A181/USB-ABM-XFT

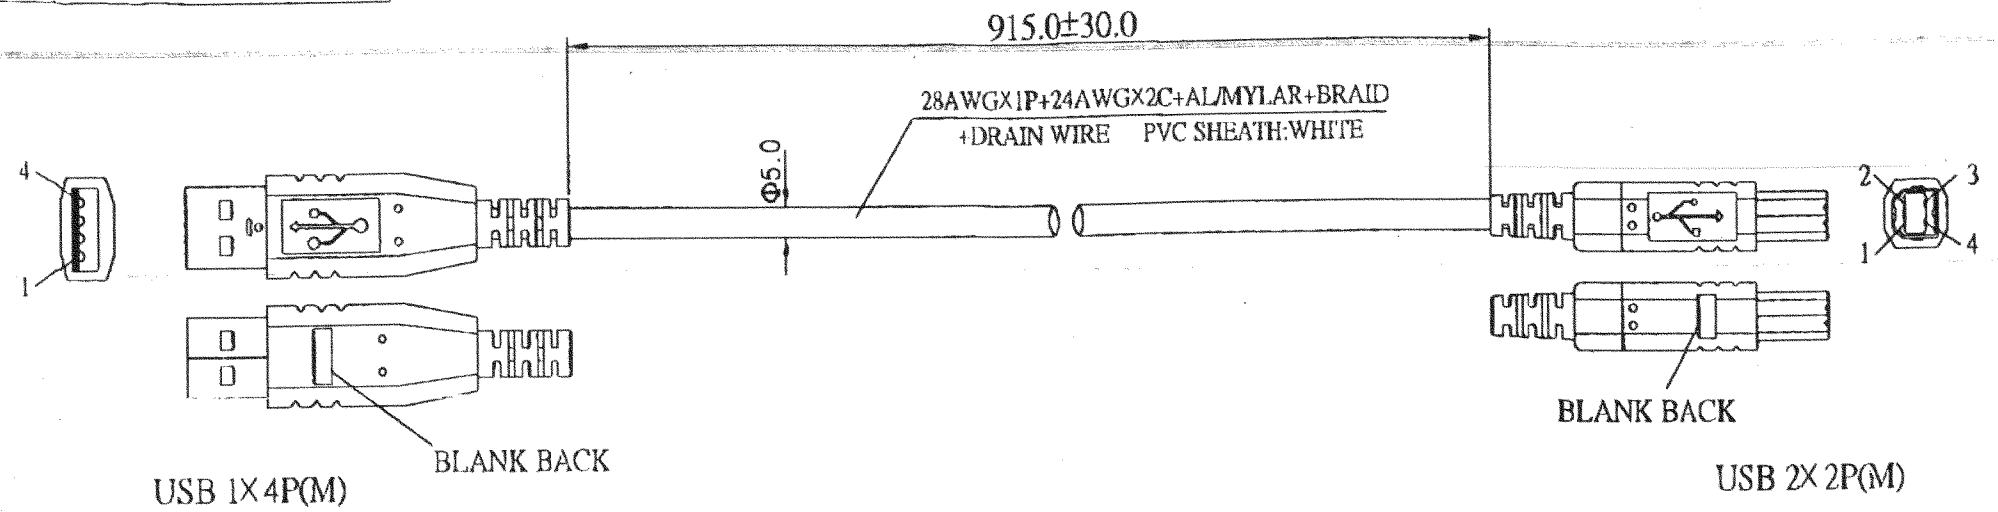

NOTE:

1.CABLE TO BE 100% TESTED FOR SHORT,OPEN,MISWIRE OR INSULATION OCCURRED.

2.TEST RESISTANCE:
CONDUCTOR RESISTANCE:1.0Ω,VOLTAGE RATING:300.0V/DC,
INSULATION RESISTANCE:5.0MΩ,WITHSTAND TIME:0.01S/POINT.
LOADING TEST:HEAD AND TAIL LOADS TWO TIMES UP AND DOWN.

3.MOLDING NO.:2DC-151,2DC-161;PVC COLOR:WHITE.

4.PACKING:

1PC/MINI TIE	L=90mm WHITE
1PC/PE BAG	15x17cm
PCS/BOX	47x34x20cm
PCS/PLASTIC BAG	74x88cm



PIN ASSIGNMENT:

USB 1X4P(M)	1	2	3	4	64
COLOR	RED	WHITE	GREEN	BLACK	DRAIN WIRE
USB 2X2P(M)	1	2	3	4	64

REV.	ECO.NO	DATE	DESCRIPTION	APPD.
A1	N	06/22/2000	N	

PART NO.: USB-ABM- FT	USB-ABM-XFT		
THIS DRAWINGARE THE PROPERTY OF PORNGDA AND AS SUCH MAY NOT BE COPIED,REPRODUCED	UNITS.: mm	MAT'L.:	TITLE.: USB 1X4P(M)/USB 2X2P(M)
APPD.:	X±	X'±	DWG NO.: PDA-1253
CHKD.:	.X± 1.0	.X'±	
DR.: Wenxiaying	.XX±	.XX±	SCALE N / SHEET 1/1 / REV. A1